

HG60 ECONOMIC GLOSS METER



- 3.5 inch large screen with high resolution full-view display
- Display 5 sets of measurement data ,better for comparison
- Connect to PC ,more extend functions
- Super configuration of hardware,integrated multiple innovative technologies
- Automatic calibration ,convenient and quick



HG series economic gloss meter is independently developed by 3nh ,with independent intellectual property ,manufactured according to ISO2813 and GB/T 9754. HG series with characteristic of larger display screen ,supply with high-end QC software ,stable performance ,high accuracy and easy to use .

HG60 ECONOMIC GLOSS METER


Gloss measurement so easy
with one-touch to complete!

PRODUCT FEATURES

- 1.60° angle for semi gloss
2. Concise appearance, feel good
3. Display 5 sets of measurement data, good for comparison
4. Built-in lithium ion rechargeable battery
5. Basic model measurement can meet basic glossiness testing requirements
6. Connect to PC, more extend functions
7. One button for all angles measurement at the same location
8. Comply with international standards
9. Stable performance, easy to read data.



APPLICABLE INDUSTRIES

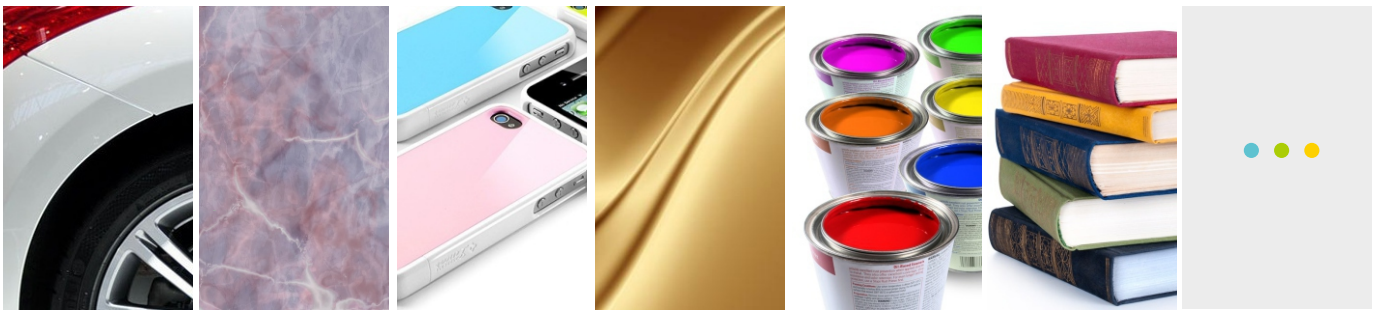

Automobile

Stonematerial

Plastic

Metal

Paints

Printing

Others

SPECIFICATION FEATURES

Model:HG60

Measuring Angle:60°

Comply with standard: ISO 2813, GB/T 9754, ASTM D 523, ASTM D 2457

Measuring Area (mm):9x15

Measuring Range:0~300GU

Division Value:0.1GU

Measurement Range:0-10GU 10-100GU 100-300GU

Repeatability:± 0.1GU ± 0.2GU ± 0.2%GU

Reproducibility:± 0.2GU ± 0.5GU ± 0.5%GU

Measurement Standard:Conform with JJG696 secondary class glossmeter working requirement

Chromaticity Corresponding:Corresponding with CIE 1931(2°) under CIE C light source

Errors:±1.5, ± 1.5%

Measuring Time: 0.5s

Dimension:L*W*H : 160mm*75mm*90mm

Weight:350g

Language:Chinese/English

Battery:3200mAh Li-ion Battery ,>10000 times(within 8 hours)

Display:TFT 3.5 inch

Interface:USB/RS-232

Storage:Basic mode: 1000

Software:GQC6 Quality Control Software with QC report printing functions and more extended functions.

Operation Temperature:0~40°C(32~104°F)


Storage Temperature:-20~50°C(-4~122°F)

Humidity:<85% relative humidity, no condensation

Standard Accessories:Power Adapter, USB cable, User Manual, GQC6 software CD (except HG60S), Calibration Plate

Optional Accessories:Miniature Printer

GUANGDONG THREENH TECHNOLOGY CO., LTD.

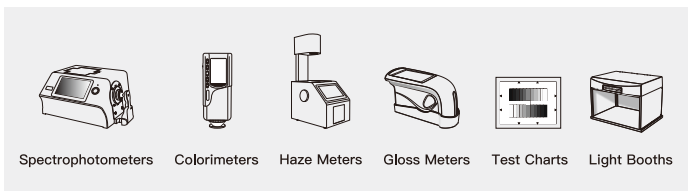

Spectrophotometers

Colorimeters

Haze Meters

Gloss Meters

Test Charts

Light Booths

★ CONTACT US

web:www.3nh.com

Email:3nh@3nh.com

Tel:0086-020-82880288

Add: 6-8th floors, Building B33, Low Carbon Headquarters Park, Xincheng Road No.400, Zengcheng District, Guangzhou, Guangdong Province, China